

Range model MKM

Technical data

10000035472-TDA-000-01



The cooking zones measures 30x30cm and has 3kW (4kW by 440V).



Technical data

Electric

In the users manual there is important information regarding supply and connections.

3~230V+PE, 50/60Hz

Туре	Zones	Power [kW]	Current con- sumption [A]
MKM 1	2 x 300x300mm	6	13/13/23
MKM 2	4 x 300x300mm	12	23/35/35
MKM 3	6 x 300x300mm	18	46/46/46

3~400V+PE, 50/60Hz

Туре	Zones	Power [kW]	Current con- sumption [A]
MKM 1	2 x 300x300mm	6	13/8/8
MKM 2	4 x 300x300mm	12	20/20/13
MKM 3	6 x 300x300mm	18	26/26/26

3~440V+PE, 50/60Hz

Туре	Zones	Power [kW]	Current con- sumption [A]
MKM 1	2 x 300x300mm	8	9/16/9
MKM 2	4 x 300x300mm	16	24/24/16
MKM 3	6 x 300x300mm	24	32/32/32

Ventilation

3~230V+PE / 3~400V+PE, 50/60Hz

Туре	Sensible [W]	Latent [W]	Steam [kg/h]
MKM 1	1200	480	0,7
MKM 2	2400	960	1,4
MKM 3	3600	1440	2,1



3~440V+PE, 50/60Hz

Туре	Sensible [W]	Latent [W]	Steam [kg/h]
MKM 1	1600	640	0,9
MKM 2	3200	1280	1,9
MKM 3	4800	1920	2,8

The data is based on the German standard VDI 2052 for dimensioning of ventilation facilities.

The values are based on experience with an average product and a normal usage, and the actual demand varies by the efficiency of the appliance, the control and the way of use.

The simultaneity factor, which can be found in VDI 2052 is not taken into account.

Ingress protection class


IPX4




Dimensions of the product

MKM 1



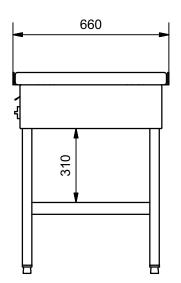

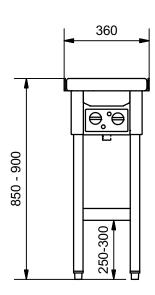




MKM 1, 300mm






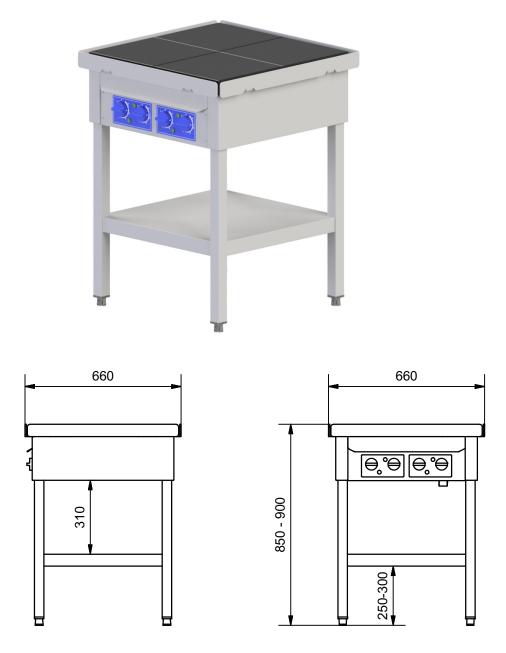




MKM 2, 300mm



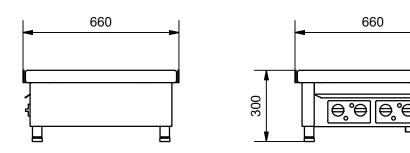




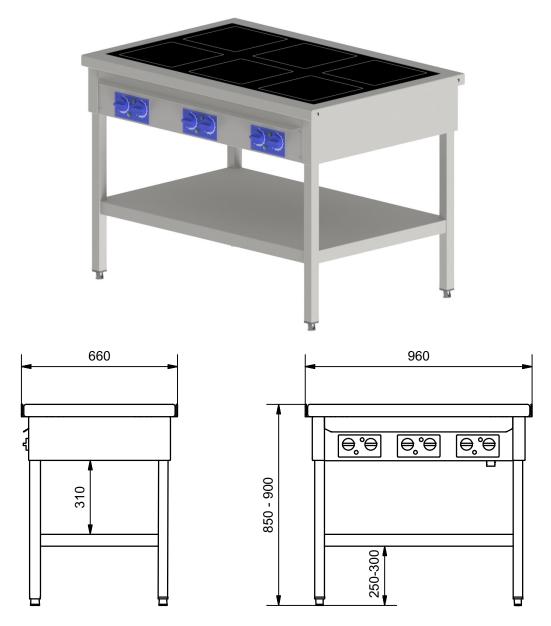



MKM 3, 300mm




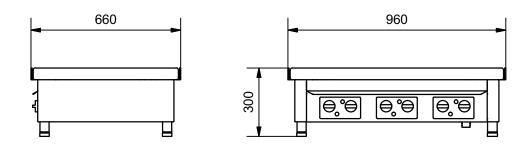




Additional equipment

Fiddles

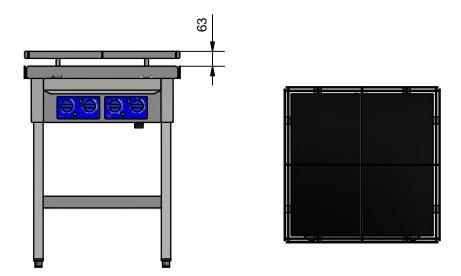


Hand rail

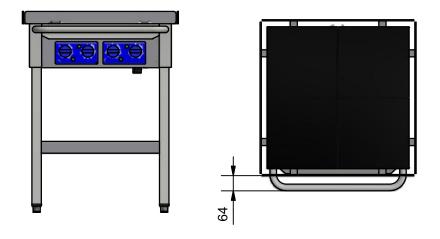

The accessory requires floor mounting and cannot be combined with electric height adjustment.





Side shelf

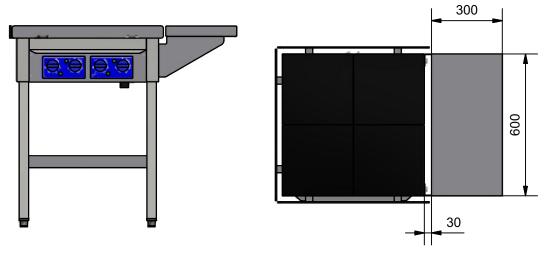

Ranges with two zones and side shelf must be fixed to the floor and cannot be equipped with electric height adjustment.

Fixing to the floor




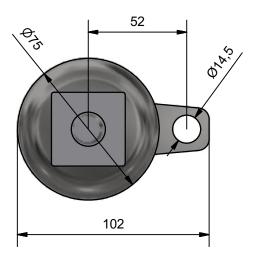



Dimensions for installation

MKM 1

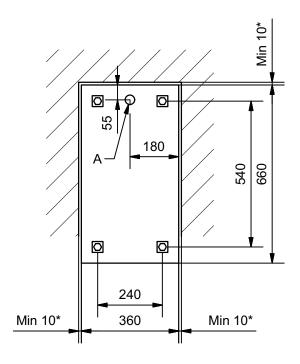


A: Minimum 800mm electrical cable over the floor.

For usage and service purposes a 800 mm minimum clearance is required at the front of the range.

^{*} Minimum 100mm when placed next to inflammable materials.



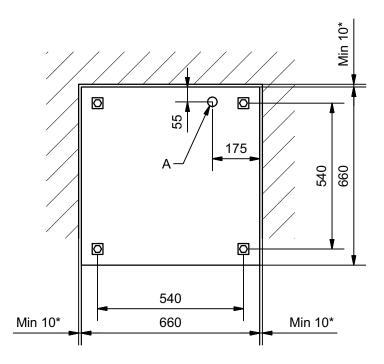


A: Minimum 800mm electrical cable over the floor.

For usage and service purposes a 800 mm minimum clearance is required at the front of the range.

^{*} Minimum 100mm when placed next to inflammable materials.



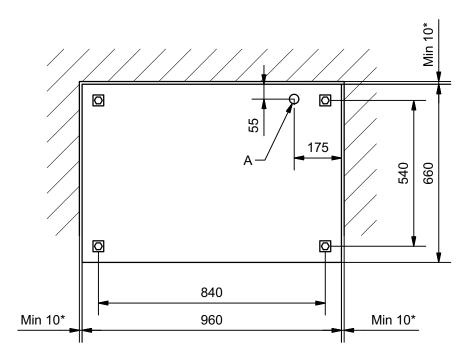

A: Minimum 800mm electrical cable over the floor.

For usage and service purposes a 800 mm minimum clearance is required at the front of the range.

^{*} Minimum 100mm when placed next to inflammable materials.